CryptoTicr

Instructions for use

The printed Quick-Start card from the box, both sides, and what has changed on the ticker since it was printed.

Need help? Call or text Lee, who designed it: (234) 575-2550

The Quick-Start card in the box

Every ticker ships with one printed card, front and back. The front is the Quick-Start Guide; the back explains the same thing without the jargon. Both sides are here, as pictures and as the file itself, for anyone who has lost the card or would rather read it on a screen.

The front: Quick-Start Guide

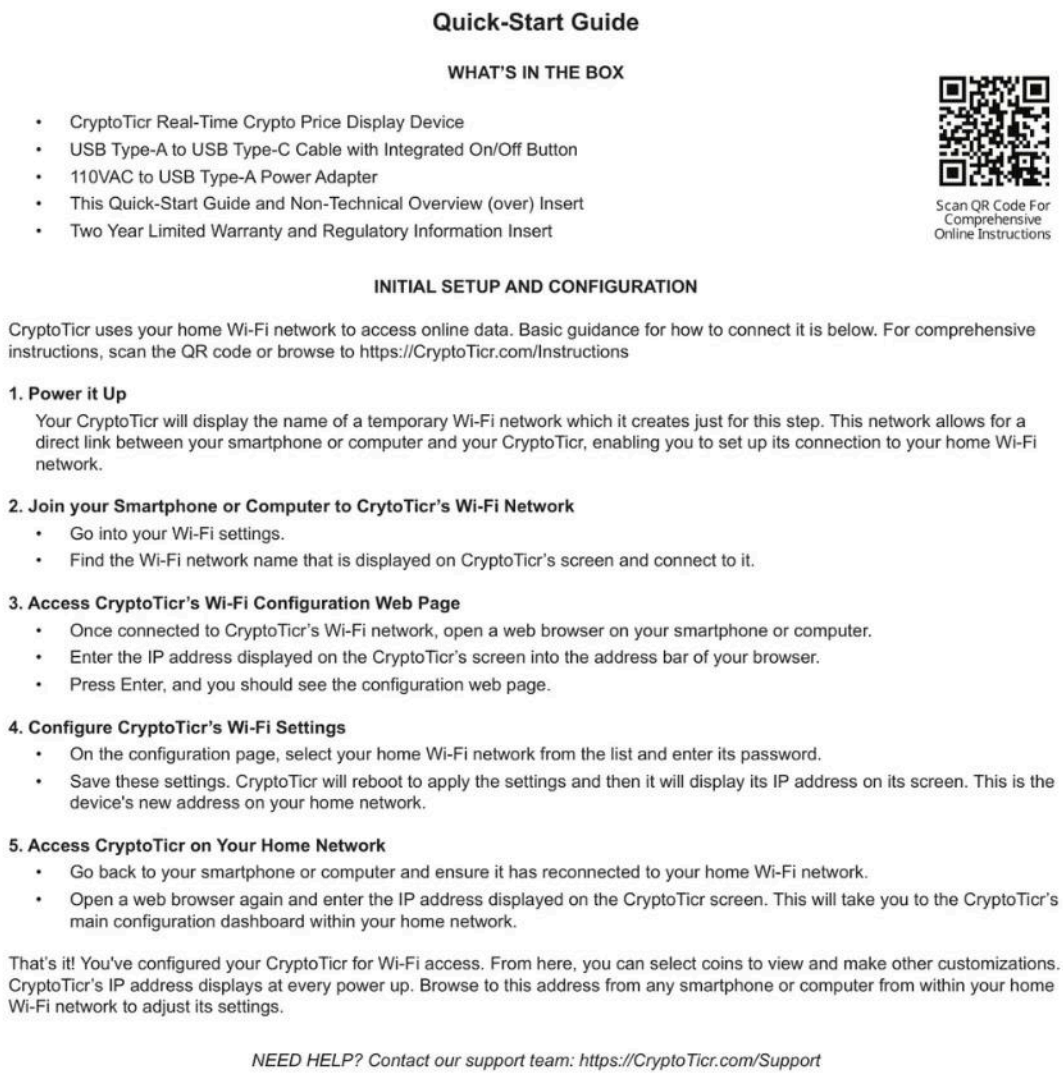

Quick-Start Guide

WHAT'S IN THE BOX

- CryptoTicr Real-Time Crypto Price Display Device
- USB Type-A to USB Type-C Cable with Integrated On/Off Button
- 110VAC to USB Type-A Power Adapter
- This Quick-Start Guide and Non-Technical Overview (over) Insert
- Two Year Limited Warranty and Regulatory Information Insert

Scan QR Code For Comprehensive Online Instructions

INITIAL SETUP AND CONFIGURATION

CryptoTicr uses your home Wi-Fi network to access online data. Basic guidance for how to connect it is below. For comprehensive instructions, scan the QR code or browse to https://CryptoTicr.com/Instructions

1. Power it Up

Your CryptoTicr will display the name of a temporary Wi-Fi network which it creates just for this step. This network allows for a direct link between your smartphone or computer and your CryptoTicr, enabling you to set up its connection to your home Wi-Fi network.

2. Join your Smartphone or Computer to CrytoTicr's Wi-Fi Network

- Go into your Wi-Fi settings.
- Find the Wi-Fi network name that is displayed on CryptoTicr's screen and connect to it.

3. Access CryptoTicr's Wi-Fi Configuration Web Page

- Once connected to CryptoTicr's Wi-Fi network, open a web browser on your smartphone or computer.
- Enter the IP address displayed on the CryptoTicr's screen into the address bar of your browser.
- Press Enter, and you should see the configuration web page.

4. Configure CryptoTicr's Wi-Fi Settings

- On the configuration page, select your home Wi-Fi network from the list and enter its password.
- Save these settings. CryptoTicr will reboot to apply the settings and then it will display its IP address on its screen. This is the device's new address on your home network.

5. Access CryptoTicr on Your Home Network

- Go back to your smartphone or computer and ensure it has reconnected to your home Wi-Fi network.
- Open a web browser again and enter the IP address displayed on the CryptoTicr screen. This will take you to the CryptoTicr's main configuration dashboard within your home network.

That's it! You've configured your CryptoTicr for Wi-Fi access. From here, you can select coins to view and make other customizations. CryptoTicr's IP address displays at every power up. Browse to this address from any smartphone or computer from within your home Wi-Fi network to adjust its settings.

NEED HELP? Contact our support team: https://CryptoTicr.com/Support

View or download the Quick-Start side (PDF)

What's in the box

- The CryptoTicr itself.
- A USB Type-A to Type-C cable with an on/off button in the lead.
- A 110 V AC to USB Type-A power adapter.
- This Quick-Start card, with the plain-English overview on the back.
- The two-year limited warranty and regulatory card.

The five steps, as printed

1. **Power it up.** The ticker shows the name of a temporary Wi-Fi network it makes for this one job. That network is how your phone talks to the ticker directly.
2. **Join that network.** Open your phone's Wi-Fi settings, find the name on the ticker's screen, and join it.
3. **Open the ticker's setup page.** With your phone on that network, open a browser and go to the address the ticker shows.
4. **Give it your Wi-Fi.** Pick your home network from the list, type its password, and save. The ticker restarts and shows its new address on your home network.
5. **Come back on your own Wi-Fi.** Let your phone rejoin your home network, then open that address to reach the settings page.

The back: the same thing in plain English

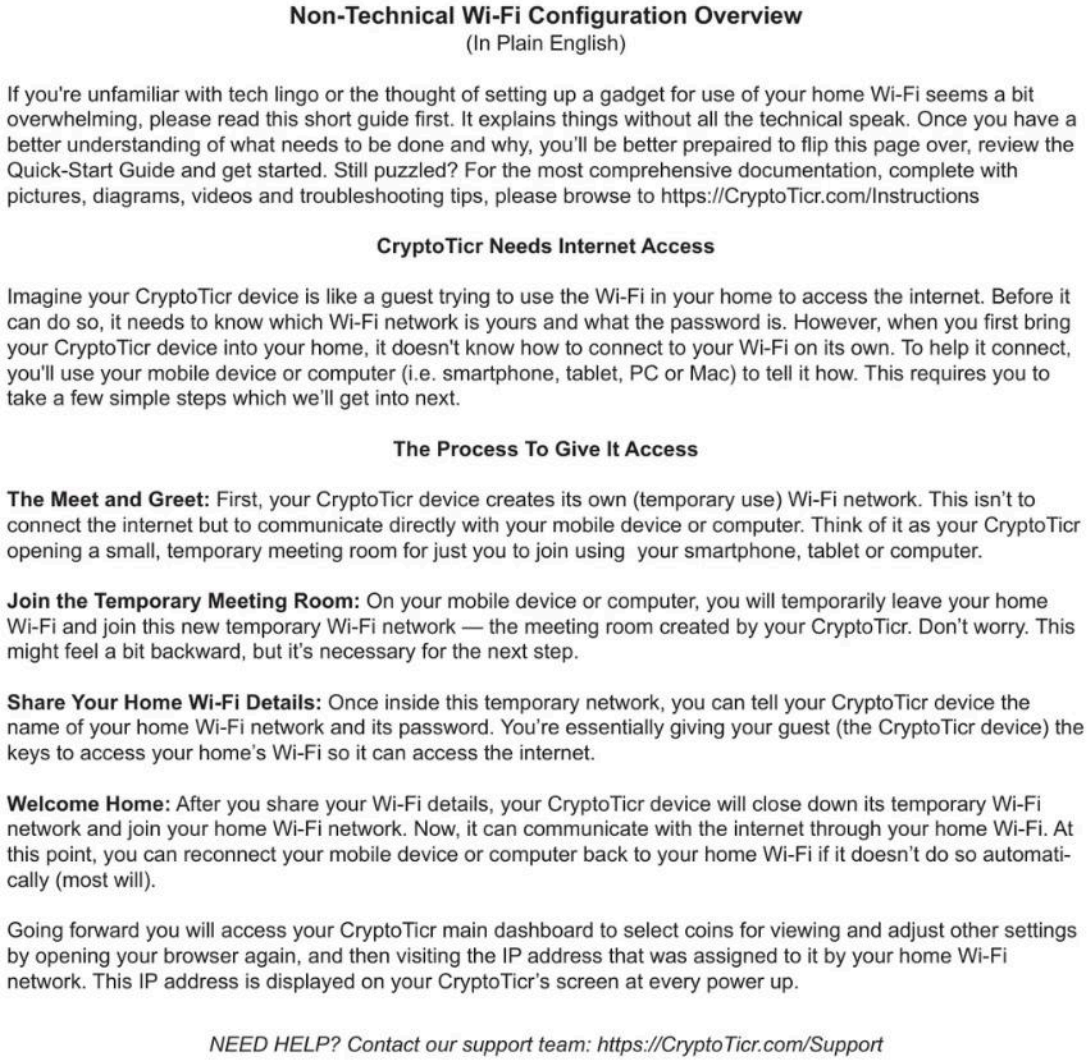

Non-Technical Wi-Fi Configuration Overview
(In Plain English)

If you're unfamiliar with tech lingo or the thought of setting up a gadget for use of your home Wi-Fi seems a bit overwhelming, please read this short guide first. It explains things without all the technical speak. Once you have a better understanding of what needs to be done and why, you'll be better prepaired to flip this page over, review the Quick-Start Guide and get started. Still puzzled? For the most comprehensive documentation, complete with pictures, diagrams, videos and troubleshooting tips, please browse to https://CryptoTicr.com/Instructions

CryptoTicr Needs Internet Access

Imagine your CryptoTicr device is like a guest trying to use the Wi-Fi in your home to access the internet. Before it can do so, it needs to know which Wi-Fi network is yours and what the password is. However, when you first bring your CryptoTicr device into your home, it doesn't know how to connect to your Wi-Fi on its own. To help it connect, you'll use your mobile device or computer (i.e. smartphone, tablet, PC or Mac) to tell it how. This requires you to take a few simple steps which we'll get into next.

The Process To Give It Access

The Meet and Greet: First, your CryptoTicr device creates its own (temporary use) Wi-Fi network. This isn't to connect the internet but to communicate directly with your mobile device or computer. Think of it as your CryptoTicr opening a small, temporary meeting room for just you to join using your smartphone, tablet or computer.

Join the Temporary Meeting Room: On your mobile device or computer, you will temporarily leave your home Wi-Fi and join this new temporary Wi-Fi network — the meeting room created by your CryptoTicr. Don't worry. This might feel a bit backward, but it's necessary for the next step.

Share Your Home Wi-Fi Details: Once inside this temporary network, you can tell your CryptoTicr device the name of your home Wi-Fi network and its password. You're essentially giving your guest (the CryptoTicr device) the keys to access your home's Wi-Fi so it can access the internet.

Welcome Home: After you share your Wi-Fi details, your CryptoTicr device will close down its temporary Wi-Fi network and join your home Wi-Fi network. Now, it can communicate with the internet through your home Wi-Fi. At this point, you can reconnect your mobile device or computer back to your home Wi-Fi if it doesn't do so automatically (most will).

Going forward you will access your CryptoTicr main dashboard to select coins for viewing and adjust other settings by opening your browser again, and then visiting the IP address that was assigned to it by your home Wi-Fi network. This IP address is displayed on your CryptoTicr's screen at every power up.

NEED HELP? Contact our support team: https://CryptoTicr.com/Support

View or download the plain-English side (PDF)

The whole of that side is on Wi-Fi setup in plain English.

What has changed since the card was printed

The card is still right about the shape of the job. Two details on the ticker are friendlier now than the card describes:

- **The setup page usually opens by itself.** On most phones, joining the ticker's network pops the page up without you typing anything. The ticker says so on its screen, and gives the address to type only if the page does not appear. That address is `192.168.4.1`, and it is shown as a QR code too.

- **The ticker now explains itself while you work.** It shows what it is doing at each step, names the network it is joining, and says what went wrong if a join fails, rather than leaving you to guess. Every one of those screens is on Screen messages during setup.

The current step-by-step, with a picture at each step, is Quick start.